

MC1307P


DEVICE DISCONTINUED – CONSULT FACTORY

MONOLITHIC FM MULTIPLEX  
STEREO DEMODULATOR

... designed to derive the left and right channel audio information from the detected composite signal.

- Capable of Operation Over a Wide Power Supply Range – 8.0 – 14 Vdc
- Built-in Stereo-Indicator Lamp Driver


FM MULTIPLEX  
STEREO DEMODULATOR  
SILICON MONOLITHIC  
INTEGRATED CIRCUIT



PLASTIC PACKAGE  
CASE 646



FIGURE 1 – TYPICAL CIRCUIT CONFIGURATION

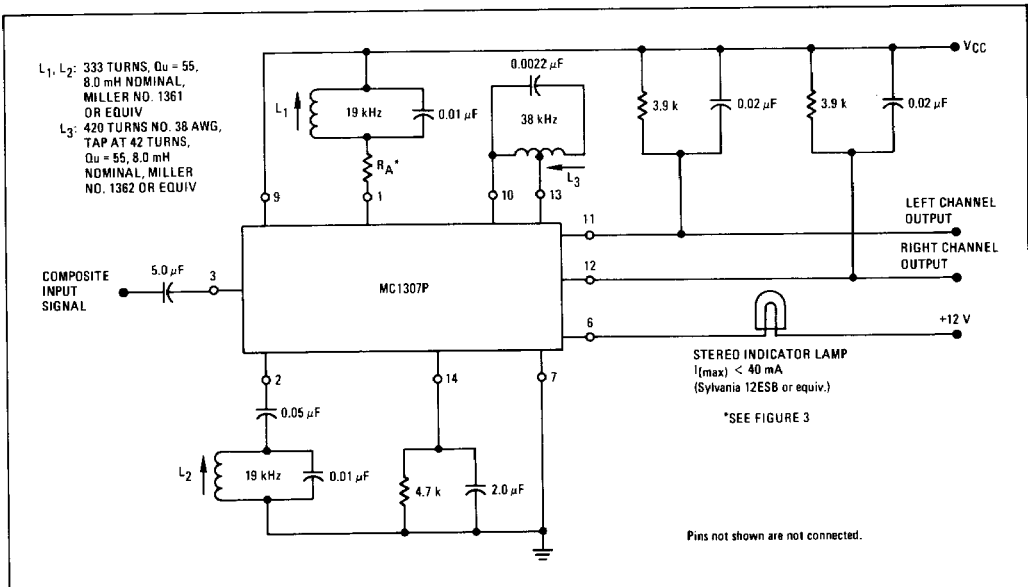


TYPICAL DC VOLTAGES (All measured using a VTVM with respect to Pin 7 (lamp on),  $R_A = 180 \text{ ohms}$ , see Figure 3)

Pin Numbers	1	2	3	4	5	6	7	8	9	10	11	12	13	14
$V_{CC} = 8.5 \text{ Vdc}$	8.5	2.7	3.6	—	—	0.8	0	—	8.5	4.4	6.2	6.2	4.4	1.5
$V_{CC} = 12 \text{ Vdc}$	12	2.9	3.9	—	—	0.9	0	—	12	4.7	9.7	9.7	4.7	1.7

See Packaging Information Section for outline dimensions.

FIGURE 2 – CIRCUIT SCHEMATIC

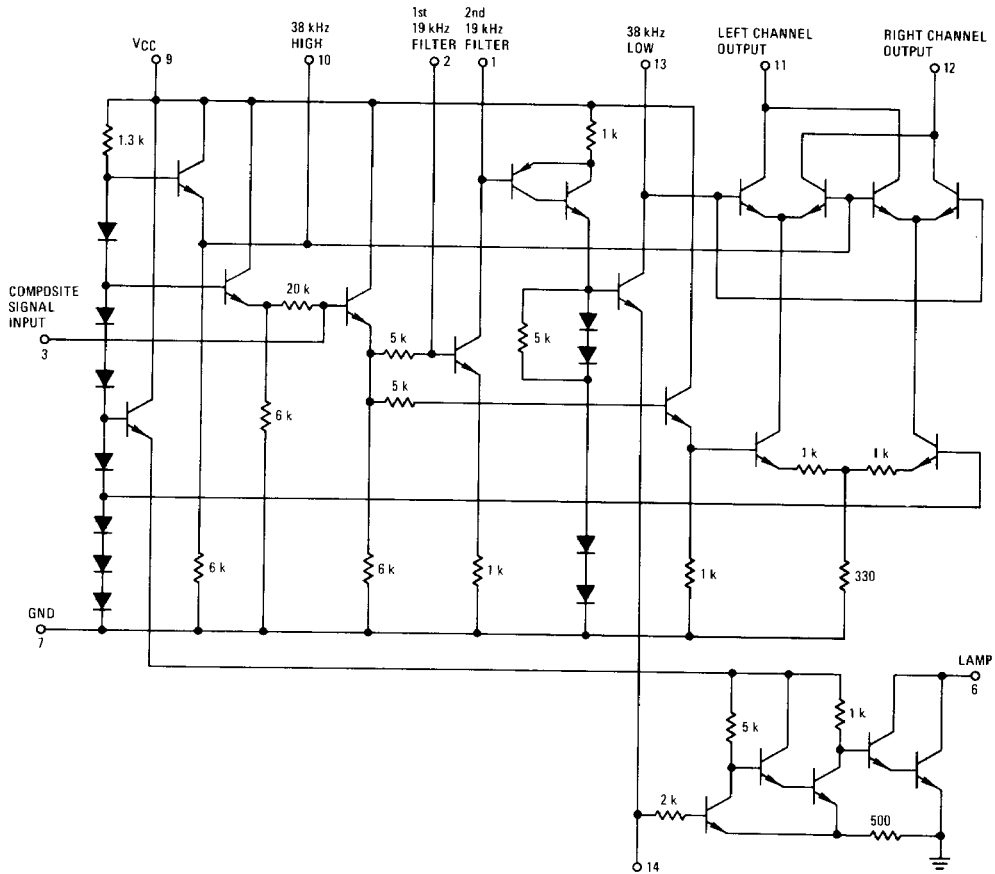

MAXIMUM RATINGS ( $T_A = +25^{\circ}\text{C}$  unless otherwise noted.)

Rating	Value	Unit
Power Supply Voltage (Pins 1, 6, 9, 11, 12) (Pin 7 is grounded)	+22	Vdc
Lamp Driver Current	40	mA <sub>dc</sub>
Power Dissipation (Package Limitation) Derate above $T_A = +25^{\circ}\text{C}$	625	mW
Operating Temperature Range (Ambient)	0 to +75	$^{\circ}\text{C}$
Storage Temperature Range	-65 to +150	$^{\circ}\text{C}$

www.DataS

# MC1307P (continued)

**ELECTRICAL CHARACTERISTICS** ( $V_{CC} = 12 \text{ Vdc}$ ,  $T_A = +25^\circ\text{C}$ , tests made with a  $75 \mu\text{s}$  de-emphasis network ( $3.9 \text{ k}\Omega$ ,  $0.02 \mu\text{F}$ ) unless otherwise noted.)

Characteristic	Min	Typ	Max	Unit
Input Impedance ( $f = 1.0 \text{ kHz}$ )	12	20	—	$\text{k}\Omega$
Stereo Channel Separation (See Note 1) ( $f = 100 \text{ Hz}$ ) ( $f = 1.0 \text{ kHz}$ ) ( $f = 10 \text{ kHz}$ )	— 20 —	35 40 30	— — —	dB
Total Harmonic Distortion (See Notes 1 and 2) (Modulation Frequency = $1.0 \text{ kHz}$ )	—	0.5	1.0	%
Channel Balance (Monaural Input = $200 \text{ mV [rms]}$ ) (Monaural, Left and Right Outputs)	—	0.5	—	dB
Ultrasonic Frequency Rejection (See Note 3) ( $19 \text{ kHz}$ ) ( $38 \text{ kHz}$ )	— —	25 20	— —	dB
Inherent SCA Rejection (without filter) ( $f = 60 \text{ kHz}$ , $67 \text{ kHz}$ and $74 \text{ kHz}$ ) (See Note 3)	—	50	—	dB
Lamp Indicator ( $R_A = 180 \Omega$ ) (Minimum $19 \text{ kHz}$ input level for lamp "on") (Maximum $19 \text{ kHz}$ input level for lamp "off")	— 5.0	16 14	25 —	$\text{mV (rms)}$
Power Dissipation ( $V_{CC} = 12 \text{ V}$ ) (Without lamp) (With lamp)	— —	140 170	300 300	$\text{mW}$


Note 1 — Measurement made with  $200 \text{ mV (rms)}$  Standard Multiplex Composite Signal where  $L = 1$ ,  $R = 0$  or  $R = 1$ ,  $L = 0$ . Standard Multiplex Composite Signal is here defined as a signal containing left and/or right audio information with a  $10\%$  ( $19 \text{ kHz}$ ) pilot signal in accordance with FCC regulations.

Note 2 — Distortion specification also applies to Monaural Signal.

Note 3 — Referenced to  $1.0 \text{ kHz}$  output signal with Standard Multiplex Composite Input Signal.

## TYPICAL CHARACTERISTICS

FIGURE 3 — DISTORTION COMPONENTS IN AUDIO SIGNAL

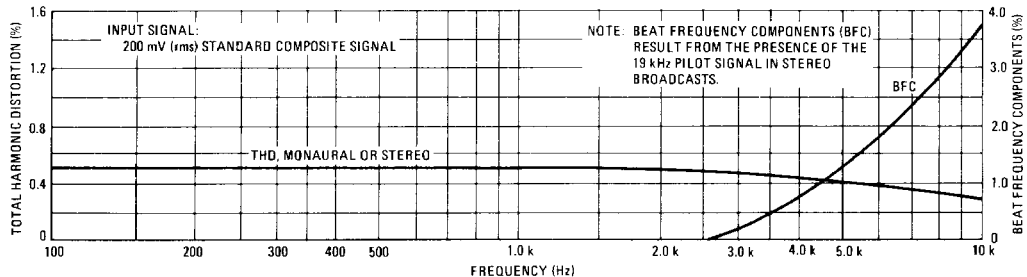

TYPICAL CHARACTERISTICS (continued)

FIGURE 4 – TOTAL HARMONIC DISTORTION

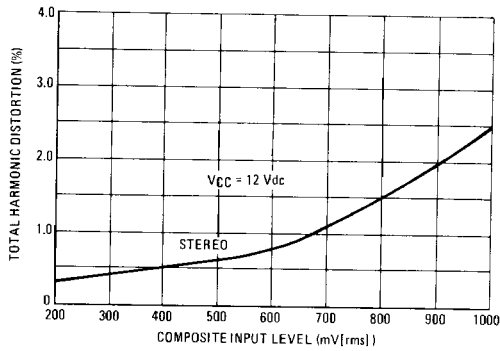


FIGURE 5 – MULTIPLEX SENSITIVITY

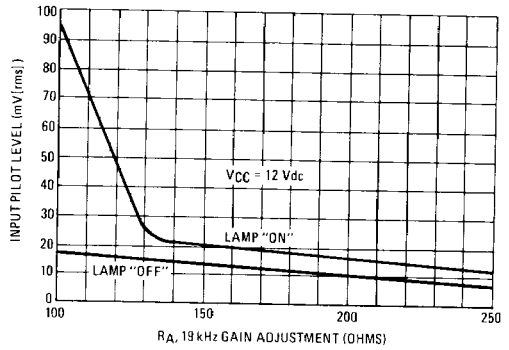


FIGURE 6 – CHANNEL SEPARATION

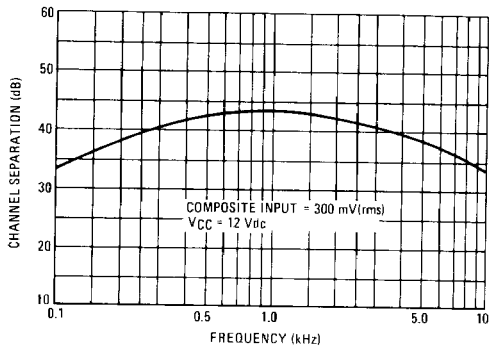


FIGURE 7 – CHANNEL SEPARATION

