

Description

The μ A741 is a high performance monolithic operational amplifier constructed using the Fairchild Planar Epitaxial process. It is intended for a wide range of analog applications. High common mode voltage range and absence of latch up tendencies make the μ A741 ideal for use as a voltage follower. The high gain and wide range of operating voltage provide superior performance in integrator, summing amplifier, and general feedback applications.

- **No Frequency Compensation Required**
- **Short Circuit Protection**
- **Offset Voltage Null Capability**
- **Large Common Mode And Differential Voltage Ranges**
- **Low Power Consumption**
- **No Latch Up**


Absolute Maximum Ratings

Storage Temperature Range	
Metal Can and Ceramic DIP	-65°C to +175°C
Molded DIP and SO-8	-65°C to +150°C
Operating Temperature Range	
Extended (μ A741AM, μ A741M)	-55°C to +125°C
Commercial (μ A741EC, μ A741C)	0°C to +70°C
Lead Temperature	
Metal Can and Ceramic DIP (soldering, 60 s)	300°C
Molded DIP and SO-8 (soldering, 10 s)	265°C
Internal Power Dissipation^{1, 2}	
8L-Metal Can	1.00 W
8L-Molded DIP	0.93 W
8L-Ceramic DIP	1.30 W
SO-8	0.81 W
Supply Voltage	
μ A741A, μ A741, μ A741E	± 22 V
μ A741C	± 18 V
Differential Input Voltage	
	± 30 V
Input Voltage³	
	± 15 V
Output Short Circuit Duration⁴	
	Indefinite

Notes

1. $T_{j \text{ Max}} = 150^\circ\text{C}$ for the Molded DIP and SO-8, and 175°C for the Metal Can and Ceramic DIP.
2. Ratings apply to ambient temperature at 25°C . Above this temperature, derate the 8L-Metal Can at $6.7 \text{ mW}/^\circ\text{C}$, the 8L-Molded DIP at $7.5 \text{ mW}/^\circ\text{C}$, the 8L-Ceramic DIP at $8.7 \text{ mW}/^\circ\text{C}$, and the SO-8 at $6.5 \text{ mW}/^\circ\text{C}$.
3. For supply voltages less than ± 15 V, the absolute maximum input voltage is equal to the supply voltage.
4. Short circuit may be to ground or either supply. Rating applies to 125°C case temperature or 75°C ambient temperature.

Connection Diagram
8-Lead Metal Package
(Top View)




Lead 4 connected to case.

Order Information

Device Code	Package Code	Package Description
μ A741HM	5W	Metal
μ A741HC	5W	Metal
μ A741AHM	5W	Metal
μ A741EHC	5W	Metal


Connection Diagram
8-Lead DIP and SO-8 Package
(Top View)



Order Information

Device Code	Package Code	Package Description
μ A741RM	6T	Ceramic DIP
μ A741RC	6T	Ceramic DIP
μ A741SC	KC	Molded Surface Mount
μ A741TC	9T	Molded DIP
μ A741ARM	6T	Ceramic DIP
μ A741ERC	6T	Ceramic DIP
μ A741ETC	9T	Molded DIP

Equivalent Circuit

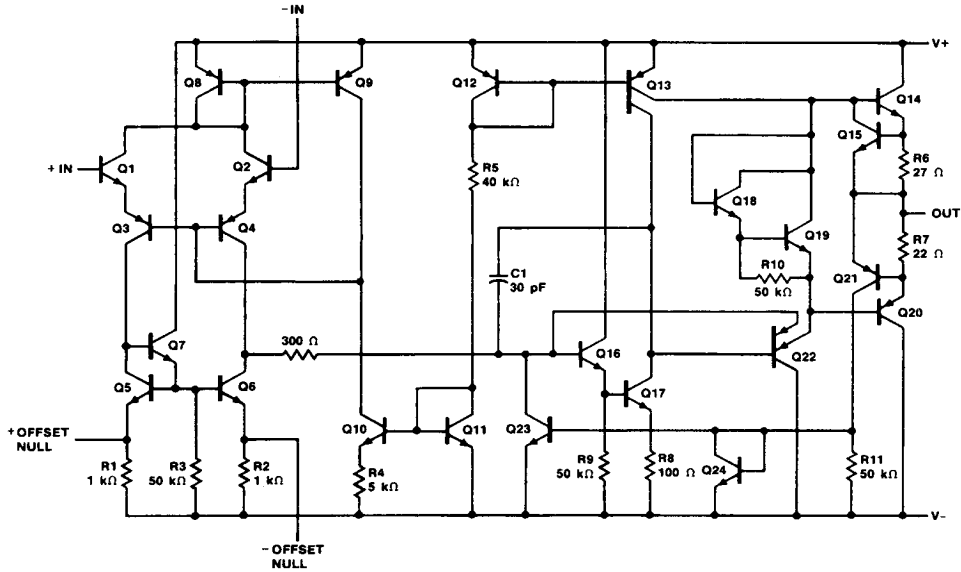

8000351F

μA741

μA741 and μA741C

Electrical Characteristics $T_A = 25^\circ\text{C}$, $V_{CC} = \pm 15\text{ V}$, unless otherwise specified.

Symbol	Characteristic	Condition	μA741			μA741C			Unit
			Min	Typ	Max	Min	Typ	Max	
V_{IO}	Input Offset Voltage	$R_S \leq 10\text{ k}\Omega$		1.0	5.0		2.0	6.0	mV
$V_{IO\text{ adj}}$	Input Offset Voltage Adjustment Range			± 15			± 15		mV
I_{IO}	Input Offset Current			20	200		20	200	nA
I_{IB}	Input Bias Current			80	500		80	500	nA
Z_i	Input Impedance		0.3	2.0		0.3	2.0		MΩ
I_{CC}	Supply Current			1.7	2.8		1.7	2.8	mA
P_c	Power Consumption			50	85		50	85	mW
CMR	Common Mode Rejection		70			70	90		dB
V_{IR}	Input Voltage Range		± 12	± 13		± 12	± 13		V
PSRR	Power Supply Rejection Ratio			30	150				μV/V
		$V_{CC} = \pm 5.0\text{ V to } \pm 18\text{ V}$					30	150	
I_{OS}	Output Short Circuit Current			25			25		mA
A_{VS}	Large Signal Voltage Gain	$R_L \geq 2.0\text{ k}\Omega$, $V_O = \pm 10\text{ V}$	50	200		20	200		V/mV
V_{OP}	Output Voltage Swing	$R_L = 10\text{ k}\Omega$	± 12			± 12	± 14		V
		$R_L = 2.0\text{ k}\Omega$	± 10			± 10	± 13		
TR	Transient Response	Rise time		0.3			0.3		μs
		Overshoot		5.0			5.0		%
BW	Bandwidth			1.0			1.0		MHz
SR	Slew Rate	$R_L \geq 2.0\text{ k}\Omega$, $A_V = 1.0$		0.5			0.5		V/μs

μA741

μA741 and μA741C (Cont.)

Electrical Characteristics Over the range of $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for μA741, $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$ for μA741C, unless otherwise specified.

Symbol	Characteristic	Condition	μA741			μA741C			Unit	
			Min	Typ	Max	Min	Typ	Max		
V _{IO}	Input Offset Voltage							7.5	mV	
		R _S ≤ 10 kΩ		1.0	6.0					
V _{IO adj}	Input Offset Voltage Adjustment Range			± 15			± 15		mV	
I _{IO}	Input Offset Current							300	nA	
		T _A = +125°C		7.0	200					
		T _A = -55°C		85	500					
I _{IB}	Input Bias Current							800	nA	
		T _A = +125°C		0.03	0.5					μA
		T _A = -55°C		0.3	1.5					
I _{CC}	Supply Current	T _A = +125°C		1.5	2.5				mA	
		T _A = -55°C		2.0	3.3					
P _C	Power Consumption	T _A = +125°C		45	75				mW	
		T _A = -55°C		60	100					
CMR	Common Mode Rejection	R _S ≤ 10 kΩ	70	90					dB	
V _{IR}	Input Voltage Range		± 12	± 13					V	
PSRR	Power Supply Rejection Ratio			30	150				μV/V	
A _{VS}	Large Signal Voltage Gain	R _L ≥ 2.0 kΩ, V _O = ± 10 V	25			15			V/mV	
V _{OP}	Output Voltage Swing	R _L = 10 kΩ	± 12	± 14					V	
		R _L = 2.0 kΩ	± 10	± 13		± 10	± 13			

7

μA741

μA741A and μA741E

Electrical Characteristics $T_A = 25^\circ\text{C}$, $V_{CC} = \pm 15\text{ V}$, unless otherwise specified.


Symbol	Characteristic	Condition	Min	Typ	Max	Unit	
V_{IO}	Input Offset Voltage	$R_S \leq 50\ \Omega$		0.8	3.0	mV	
I_{IO}	Input Offset Current			3.0	30	nA	
I_{IB}	Input Bias Current			30	80	nA	
Z_i	Input Impedance	$V_{CC} = \pm 20\text{ V}$	1.0	6.0		MΩ	
P_c	Power Consumption	$V_{CC} = \pm 20\text{ V}$		80	150	mW	
PSRR	Power Supply Rejection Ratio	$V_{CC} = +10\text{ V}, -20\text{ V}$ to $V_{CC} = +20\text{ V}, -10\text{ V},$ $R_S = 50\ \Omega$		15	50	μV/V	
I_{OS}	Output Short Circuit Current		10	25	40	mA	
A_{VS}	Large Signal Voltage Gain	$V_{CC} = \pm 20\text{ V}, R_L \geq 2.0\text{ k}\Omega, V_O = \pm 15\text{ V}$	50	200		V/mV	
TR	Transient Response	Rise time Overshoot	$A_V = 1.0, V_{CC} = \pm 20\text{ V}, V_i = 50\text{ mV},$ $R_L = 2.0\text{ k}\Omega, C_L = 100\text{ pF}$		0.25	0.8	μs
					6.0	20	%
BW	Bandwidth		0.437	1.5		MHz	
SR	Slew Rate	$V_i = \pm 10\text{ V}, A_V = 1.0$	0.3	0.7		V/μs	

The following specifications apply over the range of $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ for the μA741A, and $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$ for the μA741E.

V_{IO}	Input Offset Voltage				4.0	mV	
$\Delta V_{IO}/\Delta T$	Input Offset Voltage Temperature Sensitivity				15	μV/°C	
$V_{IO\text{ adj}}$	Input Offset Voltage Adjustment Range	$V_{CC} = \pm 20\text{ V}$	10			mV	
I_{IO}	Input Offset Current				70	nA	
$\Delta I_{IO}/\Delta T$	Input Offset Current Temperature Sensitivity				0.5	nA/°C	
I_{IB}	Input Bias Current				210	nA	
Z_i	Input Impedance		0.5			MΩ	
P_c	Power Consumption	$V_{CC} = \pm 20\text{ V}$	μA741A	-55°C		165	mW
				+125°C		135	
		μA741E			150		
CMR	Common Mode Rejection	$V_{CC} = \pm 20\text{ V}, V_i = \pm 15\text{ V}, R_S = 50\ \Omega$	80	95		dB	
I_{OS}	Output Short Circuit Current		10		40	mA	
A_{VS}	Large Signal Voltage Gain	$V_{CC} = \pm 20\text{ V}, R_L \geq 2.0\text{ k}\Omega,$ $V_O = \pm 15\text{ V}$	32			V/mV	
		$V_{CC} = \pm 5.0\text{ V}, R_L \geq 2.0\text{ k}\Omega,$ $V_O = \pm 2.0\text{ V}$	10				
V_{OP}	Output Voltage Swing	$V_{CC} = \pm 20\text{ V}$	$R_L = 10\text{ k}\Omega$	±16		V	
			$R_L = 2.0\text{ k}\Omega$	±15			


Typical Performance Curves

Voltage Gain vs Supply Voltage for μA741/A




PC05180F

Output Voltage Swing vs Supply Voltage for μA741/A




PC05170F

Input Common Mode Voltage vs Supply Voltage for μA741/A

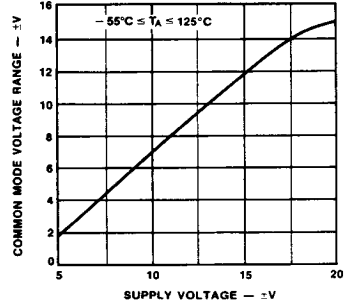


PC05180F

Voltage Gain vs Supply Voltage for μA741C/E




PC05190F

Output Voltage Swing vs Supply Voltage for μA741C/E




PC05200F

Input Common Mode Voltage Range vs Supply Voltage for μA741C/E

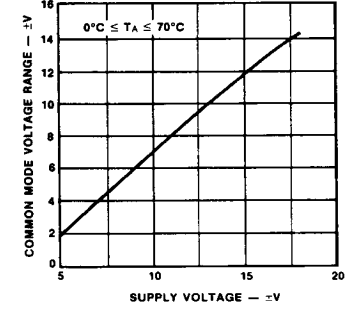


PC05210F

Transient Response for μA741C/E



PC05220F


Transient Response Test Circuit for μA741C/E



CRO1470F

Lead numbers are shown for metal package only

Common Mode Rejection Ratio vs Frequency for μA741C/E

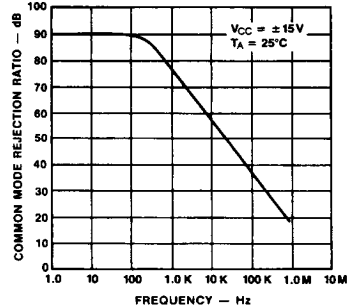


PC05241F

7


Typical Performance Curves (Cont.)

Frequency Characteristics vs Supply Voltage for μA741C/E



PC05251F


Voltage Offset Null Circuit for μA741C/E



CR01480F


Lead numbers are shown for metal package only

Open Loop Frequency Response




PC05281F

Voltage Follower Large Signal Pulse Response for μA741C/E




PC05286F

Power Consumption vs Supply Voltage




PC05271F

Open Loop Phase Response vs Frequency

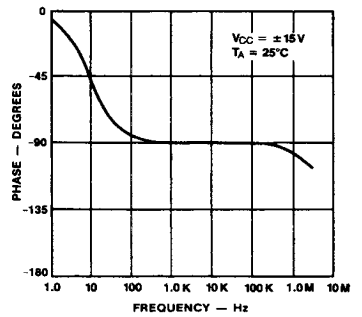


PC05291F

Input Offset Current vs Supply Voltage




PC05301F

Input Impedance and Input Capacitance vs Frequency

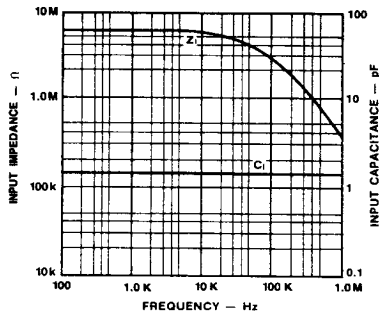

PC05311F


Output Resistance vs Frequency

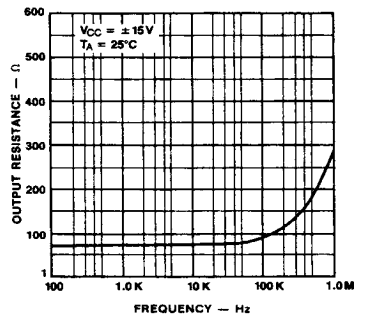

PC05321F


Typical Performance Curves (Cont.)

Output Voltage Swing vs Load Resistance




PC05330F

Output Voltage Swing vs Frequency

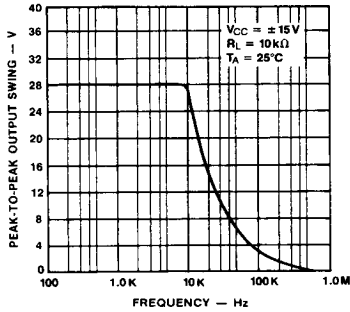


PC05341F

Input Noise Voltage vs Frequency

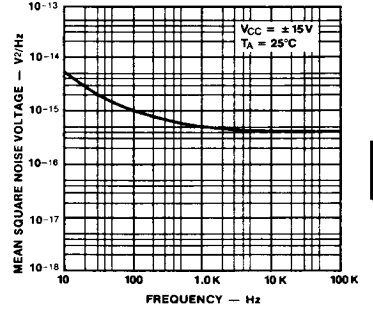


PC05361F

Input Noise Current vs Frequency

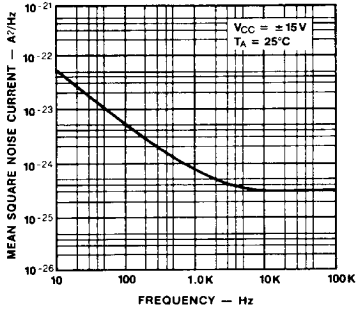


PC05371F

Broadband Noise for Various Bandwidths

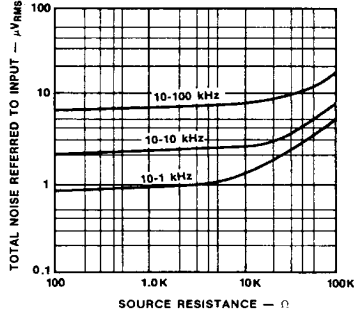


PC05381F

Input Bias Current vs Temperature for $\mu A741/A$




PC05390F

Input Impedance vs Temperature for $\mu A741/A$



PC05401F


Short Circuit Current vs Temperature for $\mu A741/A$

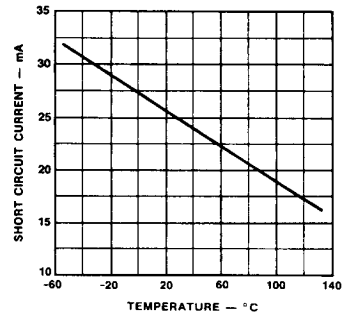

PC05411F


Typical Performance Curves (Cont.)

Input Offset Current vs Temperature for μ A741/A




PC05420F

Power Consumption vs Temperature for μ A741/A




PC05430F

Frequency Characteristics vs Temperature for μ A741/A




PC05440F

Input Bias Current vs Temperature for μ A741C/E




PC05450F

Input Impedance vs Temperature for μ A741C/E




PC05461F

Input Offset Current vs Temperature for μ A741C/E




PC05470F

Power Consumption vs Temperature for μ A741C/E




PC05480F

Short Circuit Current vs Temperature for μ A741C/E



PC05491F

Frequency Characteristics vs Temperature for μ A741C/E



PC05500F