

Electrical Specifications - maximum limiting values when measured in HCMOS test circuit.


Frequency Range	Frequency Stability	Supply Voltage	Supply Current	*Rise Time(t _r)	*Fall Time(t _f)	**Duty Cycle	Model Number
1.0 to < 100.0kHz	±25ppm, ±50ppm, ±100ppm	5V±0.25V	10mA	10ns	10ns	45/55%	IQX0-350, -350I
100.0 to < 250.0kHz	±25ppm, ±50ppm, ±100ppm	5V±0.25V	10mA	15ns	15ns	45/55%	IQX0-350, -350I
250.0kHz to < 5.0MHz	±25ppm, ±50ppm, ±100ppm	5V±0.25V	30mA	15ns	15ns	45/55%	IQX0-350, -350I
5.0 to < 16.0MHz	±25ppm, ±50ppm, ±100ppm	5V±0.25V	15mA	10ns	10ns	45/55%	IQX0-350, -350I
16.0 to < 30.0MHz	±25ppm, ±50ppm, ±100ppm	5V±0.25V	30mA	10ns	10ns	45/55%	IQX0-350, -350I
30.0 to < 50.0MHz	±25ppm, ±50ppm, ±100ppm	5V±0.25V	40mA	8ns	8ns	45/55%	IQX0-350, -350I
50.0 to < 70.0MHz	±25ppm, ±50ppm, ±100ppm	5V±0.25V	50mA	6ns	6ns	40/60%	IQX0-350, -350I
70.0 to 160.0MHz	±25ppm, ±50ppm, ±100ppm	5V±0.25V	70mA	5ns	5ns	40/60%	IQX0-350, -350I

Ordering Example
 Frequency _____ 22.0MHz
 Model number: -350 _____ IQX0-350I
 Operating Temperature Code: I = -40 to 85°C Not applicable for 0 to 70°C _____ B
 Frequency Stability: A = ±25ppm, B = ±50ppm, C = ±100ppm _____

LEADED SPXDS


Please note that the rise and fall times listed are the maximum values we specify to cover various frequency breaks. In practise the actual values are generally lower depending upon the spot frequency chosen. For typical values please contact our sales office.

Test Circuit - TTL

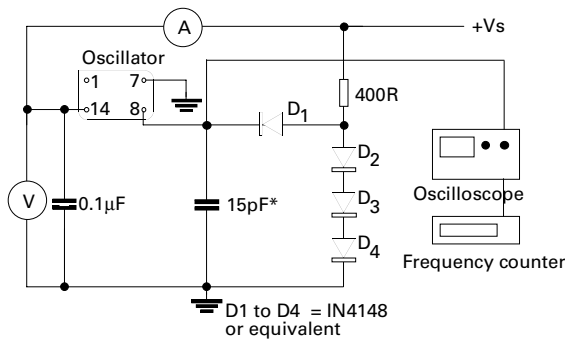

*Inclusive of jiggging & equipment capacitance

Test Circuit - LSTTL

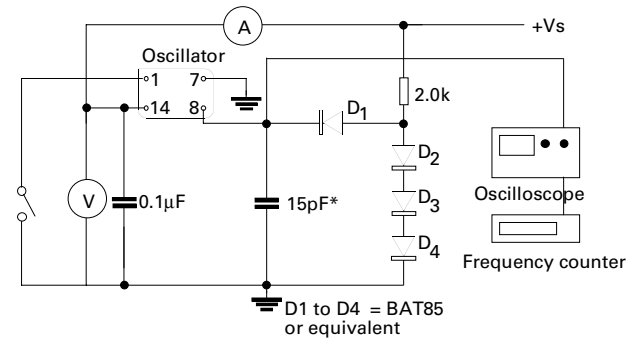

*Inclusive of jiggging & equipment capacitance

Note: Pin 1 = No connection on non tri-state models